

STEAM KETTLE

Tilting, Direct Steam, 2/3 Steam Jacketed

MODELS: DMT-30 (30 Gallon/114 Liter)
DMT-40 (40 Gallon/152 Liter)
DMT-60 (60 Gallon/228 Liter)



Model DMT-60

OPERATION:

- ☐ Kettle operation shall be by direct steam at 5 to 35 PSI (.04 to 2.4 kg/cm²)
- ☐ Tilt mechanism is powered by ½ H.P. motor requiring 115 volt single phase, 60 Hz, 10 amps.

■ INQUIRE TO FACTORY FOR SPECIAL OR CUSTOM REQUIREMENTS.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

Southbend Steam Kettles offer unsurpassed versatility . . . rugged, dependable and are the most durable you can buy . . . up to 25% heavier than other competitive models, as proven by a comparison of shipping weights.

Assembly Structure

Each kettle is constructed of stainless steel and mounted in enclosed cabinet base with steam control and hot/cold water fill faucet mounted on stainless steel counter top. Kettle is equipped with 1½" sanitary draw off and enclosed for sanitary purposes. A swing drain for draw off is removable without tools and is equipped with a removable strainer. The 30 and 40 gallon kettles include a one-piece, stainless steel counter balanced cover. Tilting type kettles tilt nearly upright to allow complete emptying of contents and have a pan support, removable without tools, which will lock pan in a horizontal position not more than 2" from kettle lip throughout tilting operation.

NOTE: Tilting may be stopped at any time without kettle settling back. Pan support holds one 12" x 20" pan.

Cabinet Base

The cabinet base is modular in design to match other Southbend cooking equipment and is equipped with 6" stainless steel legs with hold-down feet in rear. Polished stainless steel doors have magnetic latches.

Technical Data

Unit dimensions, utility information, construction specifications and miscellaneous information is listed on the reverse side.

Warranty

One year Parts and Labor Warranty at no extra charge from the date of purchase.





MODELS:

☐ DMT-30

☐ DMT-40

☐ DMT-60

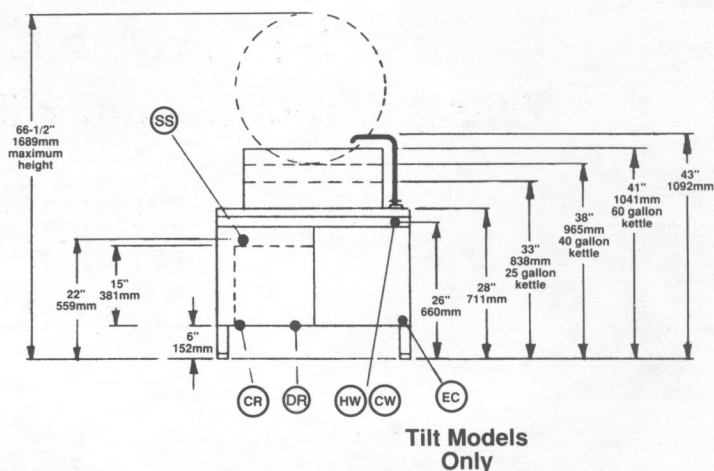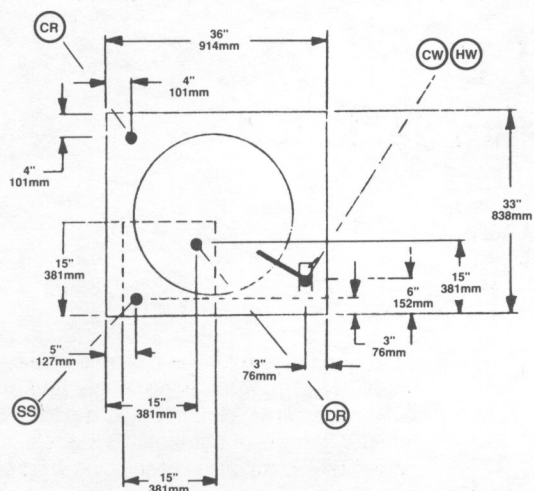

Specifications are subject to change without notice.

Not For Scale. For Dimensional Purposes Only.

SERVICE CONNECTIONS — DIRECT CONNECTED

HW Hot Water: 3/8" (10 mm) nominal tubing to kettle fill faucet.

CW Cold Water: 3/8" (10 mm) nominal tubing to kettle fill faucet.

DR Drain: Pipe full 2" IPS (51 mm) to flush drain. DO NOT MAKE SOLID CONNECTIONS TO DRAIN.

SS* Steam Supply: 3/4" (19 mm) IPS 5-35 PSI (.04-240 kg/cm²).

CR Condensate Return: 1/2" IPS (13 mm) connection for condensate return from kettle when specified.

EC 115V 1ph 60 Hz - 10 amps. Unit comes with cord and grounding male plug.

NOTES:

- *Pressure reducing valve is required if incoming pressure exceeds 35 PSI.
- *Recess area for kettle draw off (dotted line) must be kept free of all piping and connections.
- *Tilting kettles shall be equipped with 6" (152 mm) adjustable holddown feet in the rear.



southbend

A MIDDLEBURY COMPANY